


PUTNAM PUBLIC SERVICE DISTRICT

Post Office Box 860
Scott Depot, West Virginia 25560-0860
304-757-6551 / Fax: 304-757-6558

CONDUIT LAYOUT

Install circuit run from main house panel to a Weather Proof Disconnect on outside of house; disconnect breaker shall be 20 AMP Double Pole; breaker in main house panel shall be 30 AMP Double Pole; and wire from house disconnect to control panel shall be #10/THHN, 4- Individual wires - black, red, white and green.

Install conduit run from outside disconnect to grinder control panel post; conduit to be 1" PVC, additional installation by the customer shall include a 6" x 6" x 6' treated square post with a minimum of 48" above surface for the control panel. The control panel supplied with E-One Pump will be installed and connected to customer wiring by Putnam PSD.

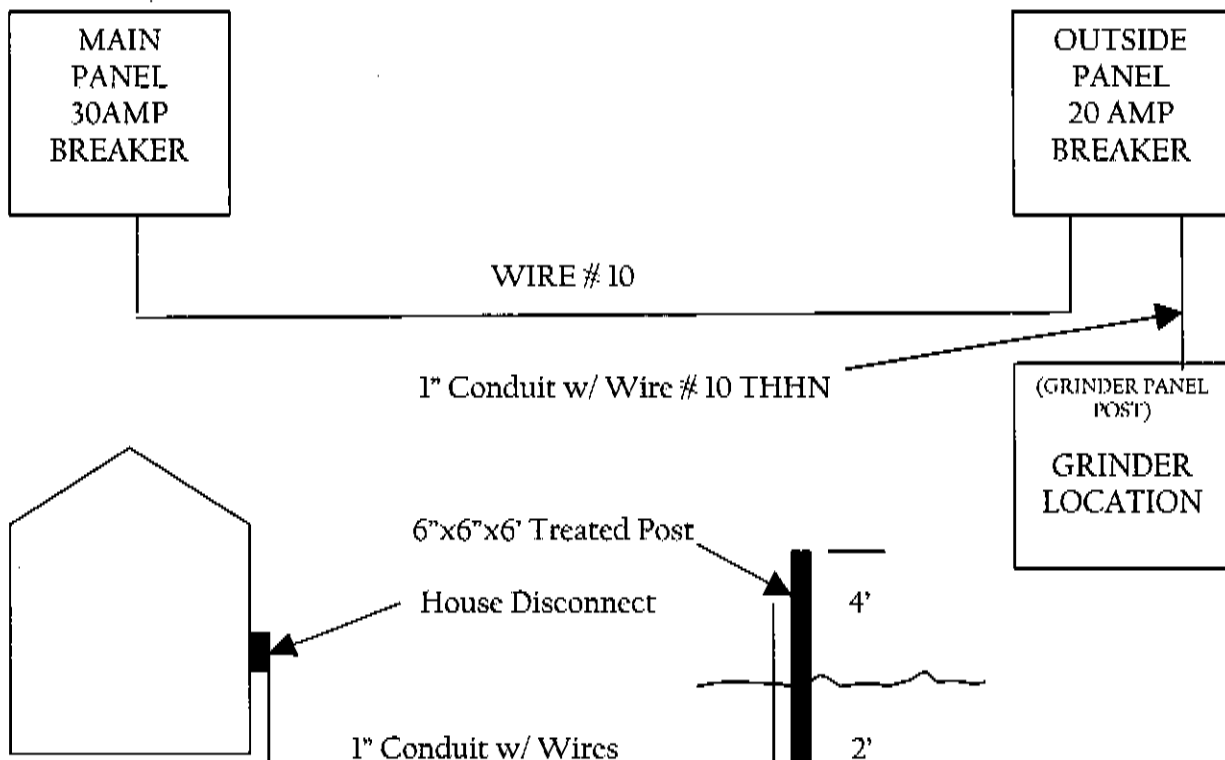

MANUFACTURED HOMES [SINGLE & DOUBLEWIDE]

Where the customer has an outside main disconnect with extra space for an additional Double Pole Breaker, they may use this space rather than going to the main panel inside. In this space they should use a 20 AMP Double Pole breaker; otherwise, the installation shall be the same as outlined above.

CUSTOMER'S SERVICE LINE TO BE INSPECTED AND APPROVED BY THE DISTRICT OR ITS DESIGNATED REPRESENTATIVE BEFORE ANY BACKFILLING IS BEGUN AND THE LINE PLACED IN SERVICE.